



Chemistry Lithium Manganese Dioxide

Designation IEC..... CR2032

Performance High Power

Cross Reference 2032

Nominal Voltage 3V

Typical Capacity 240 mAh

Service of Life 1200 hours
*1170 hours after 12 months of storage

Load 15 kOhm, at 20°C to 2 V

Open Circuit Voltage..... 3.20 ~ 3.40V

Temperatures Ranges Min Max

Storage 0°C 30°C

Discharge -20°C 60°C

Weight (Approx.) 3.0g


Dimensions ø20.0 x 3.2mm

Discharge of Life ≤ 2% / Year

Shelf life 10 Years (Standard Temperature 20±2°C)

Country of Origin China

Application Watch
Photo
Electronics

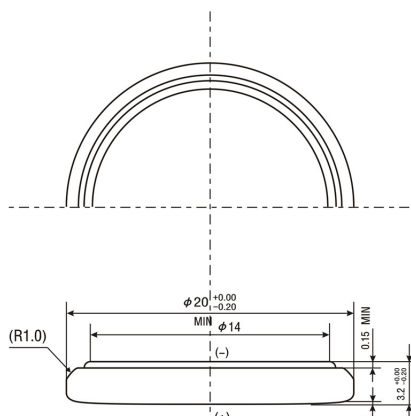

Discharge Characteristics; Discharge Load 15Kohm

